
# kubik ba15k

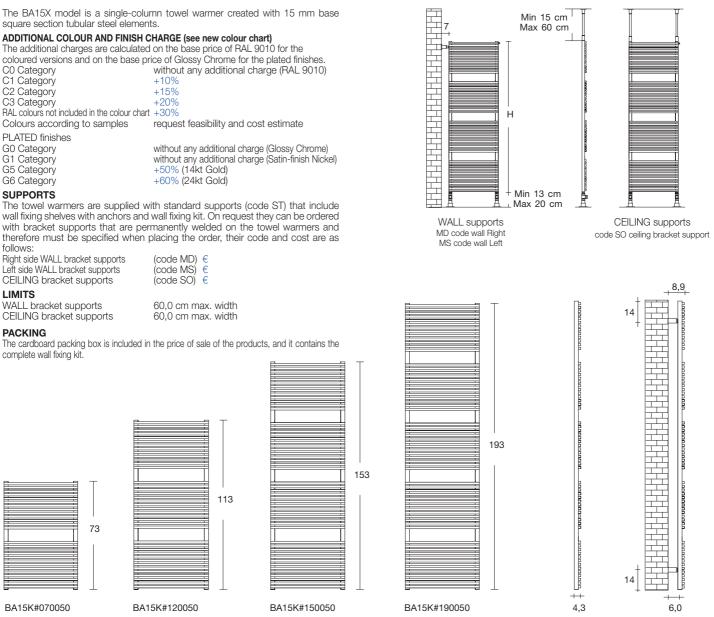

### CONNECTORS

The Kubik BA15K range of towel warmers are supplied with "0B1" connectors.


Should different connectors be required, such connections must be strictly specified in the order. IMPORTANT: the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems.

#### Standard connectors

standard connector always supplied, if not otherwise specified in the order




#### Custom-made connectors




#### Custom-made connectors able on request WITH additional Connectors avai

charae of €



**Connectors on request** Connectors available on request WITHOUT any additional charge



## kubik ba15k



# **442** Watt Kcal/

EN

Watt = Kcal/h  $\div$  0,860 Kcal/h = Watt x 0,860

To help you properly fill out the code relative to the item requested see code examples on page 5 For correction factors different to  $\Delta T$  50°C see page 206

#### HYDRAULIC VERSION

Code	H (cm)	<b>L</b> (cm)	Inter-axis (cm)	Watts ∆T 50°C Coloured version	Watts ∆T 50°C Chrome plated version		Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)	Chrome plated G0 (€)	Water Content (I)
BA15K#070040	73,0	40	36,6	350	237						1,498
BA15K#070050		50	46,6	455	296						1,873
BA15K#070060		60	56,6	562	355						2,247
BA15K#120040	113,0	40	36,6	516	348						2,246
BA15K#120050		50	46,6	657	435						2,808
BA15K#120060		60	56,6	800	522						3,369
BA15K#150040	153,0	40	36,6	712	454						2,995
BA15K#150050		50	46,6	893	567						3,744
BA15K#150060		60	56,6	1077	681						4,493
BA15K#190040	193,0	40	36,6	859	570						3,744
BA15K#190050		50	46,6	1074	712						4,680
BA15K#190060		60	56,6	1294	855						5,616
	Towel warmers available in stock with 0B1 connector and in White RAL 9010 colour									1 connector	

# kubik ba15ke electric and dual version

#### **ELECTRIC VERSION**

The standard electric version is supplied with a Class 2 resistor installed on the right side of the towel warmer. The resistor is equipped with safety thermal cutout and preset temperature control.

#### **MIXED VERSION (ELECTRIC/WATER)**

The mixed version is created with the application of a specific conversion kit that enables the towel warmer to operate both with the heating system's hot water and electrically.

For both versions some variants for room temperature control are available as accessories, specifically:

- Resistor with room thermostat installed in the resistor as shown in the diagram in page i 131.

- Room temperature control with DIGITAL wireless THERMOSTAT programmable with 4 different programs
- Room temperature control with wireless WALL THERMOSTAT featuring temperature adjustment and on/off button.

#### ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

C0 Category without any additional charge (RAL 9010) C1 Category  $\pm 10\%$ 

o · o alogol j	
C2 Category	+15%
C3 Category	+20%
RAL colours not included in the colour chart	+30%
Colours according to samples	request feasibility and cost estimate

Colours according to samples

PLATED finishes G0 Category G1 Category G5 Category


without any additional charge (Glossy Chrome) without any additional charge (Satin-finish Nickel) +50% (14kt Gold) +60% (24kt Gold)


#### G6 Category SUPPORTS


The towel warmers are supplied with standard supports (code ST) which include wall fixing shelves. The bracket supports are NOT possible in the electric version

#### PACKING


The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.






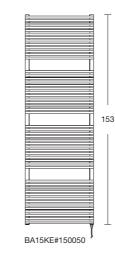


#### WIRELESS THERMOSTAT CONNECTION DIAGRAM

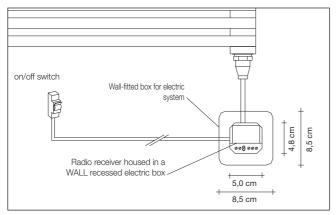

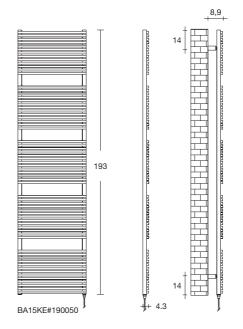

#### WIRELESS THERMOSTATS

Both these control and temperature customizing solutions require the installation of a radio receiver housed in a specific electrical box, which is to be recessed in the wall.





Wall fixing thermostat

### kubik ba15ke electric and dual version





To help you properly fill out the code relative to the item requested see code examples on page 5

#### ELECTRIC VERSION

Code	<b>H</b> * (cm)	L (cm)	Electric resistor	Resistor type	Categ RAL 90	gory C0 010 (€)	Category C1 (€)	Category C3 (€)	Chrome plated G0 (€)	
BA15KE#070040	73,0	40,0	300	Class 2						
BA15KE#070050		50,0	300	Class 2						
BA15KE#070060		60,0	600	Class 2						
BA15KE#120040	113,0	40,0	600	Class 2						
BA15KE#120050		50,0	600	Class 2						
BA15KE#120060		60,0	900	Class 2						
BA15KE#150040	153,0	40,0	600	Class 2						
BA15KE#150050		50,0	900	Class 2						
BA15KE#150060		60,0	900	Class 2						
BA15KE#190040	193,0	40,0	900	Class 2						
BA15KE#190050		50,0	900	Class 2						
BA15KE#190060		60,0	1200	Class 2						

\* The height indicated DOES NOT include the space taken up by the electrical resistor that protrudes 5cm downwards

#### DUAL VERSION

Code	<b>H</b> * (cm)	<b>L</b> (cm)	Electric resistor	Resistor type		Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)	Chrome plated G0 (€)		
BA15KM#070040	73,0	40,0	300	Class 2							
BA15KM#070050		50,0	300	Class 2							
BA15KM#070060		60,0	600	Class 2							
BA15KM#120040	113,0	40,0	600	Class 2							
BA15KM#120050		50,0	600	Class 2							
BA15KM#120060		60,0	900	Class 2							
BA15KM#150040	153,0	40,0	600	Class 2							
BA15KM#150050		50,0	900	Class 2							
BA15KM#150060		60,0	900	Class 2							
BA15KM#190040	193,0	40,0	900	Class 2							
BA15KM#190050		50,0	900	Class 2							
BA15KM#190060		60,0	1200	Class 2							
* The height DOES NOT inclu	The height DOES NOT include the space taken up by the KIT for the MIXED version that protrudes 11,5 cm downwards.										


Mixed version inter-axis: L-10,6 cm. The inter-axis in the MIXED version is not centred in respect to the towel warmer (see diagram)

#### ACCESSORIES (for electric and mixed version)

Code	Description	Finishes	Price (€)	
ZRF001	Wall-fitted booster function radio frequency emitter box (EMG TH IMH)-MCT8595			
ZRF002	Weekly programming unit via radio frequency (table version)			
ZRF003	Radiofrequency receiver for wall box (REA 1CIMH A) - MCT8600			
ZRES#S9	WHITE room thermostat for Class 2 resistors	white		
ZRES#S8	GREY room thermostat for Class 2 resistors	grey		


#### ELECTRIC VERSION DIAGRAM

CLASS 2 RESISTOR always supplied on electric version




MIXED VERSION DIAGRAM

Kit for Class 2 ELECTRIC RESISTOR, always supplied in MIXED version



ROOM THERMOSTAT with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price



Kit for ROOM THERMOSTAT kit with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

