


AN·TRAX IT


BATH

BDO TRIM

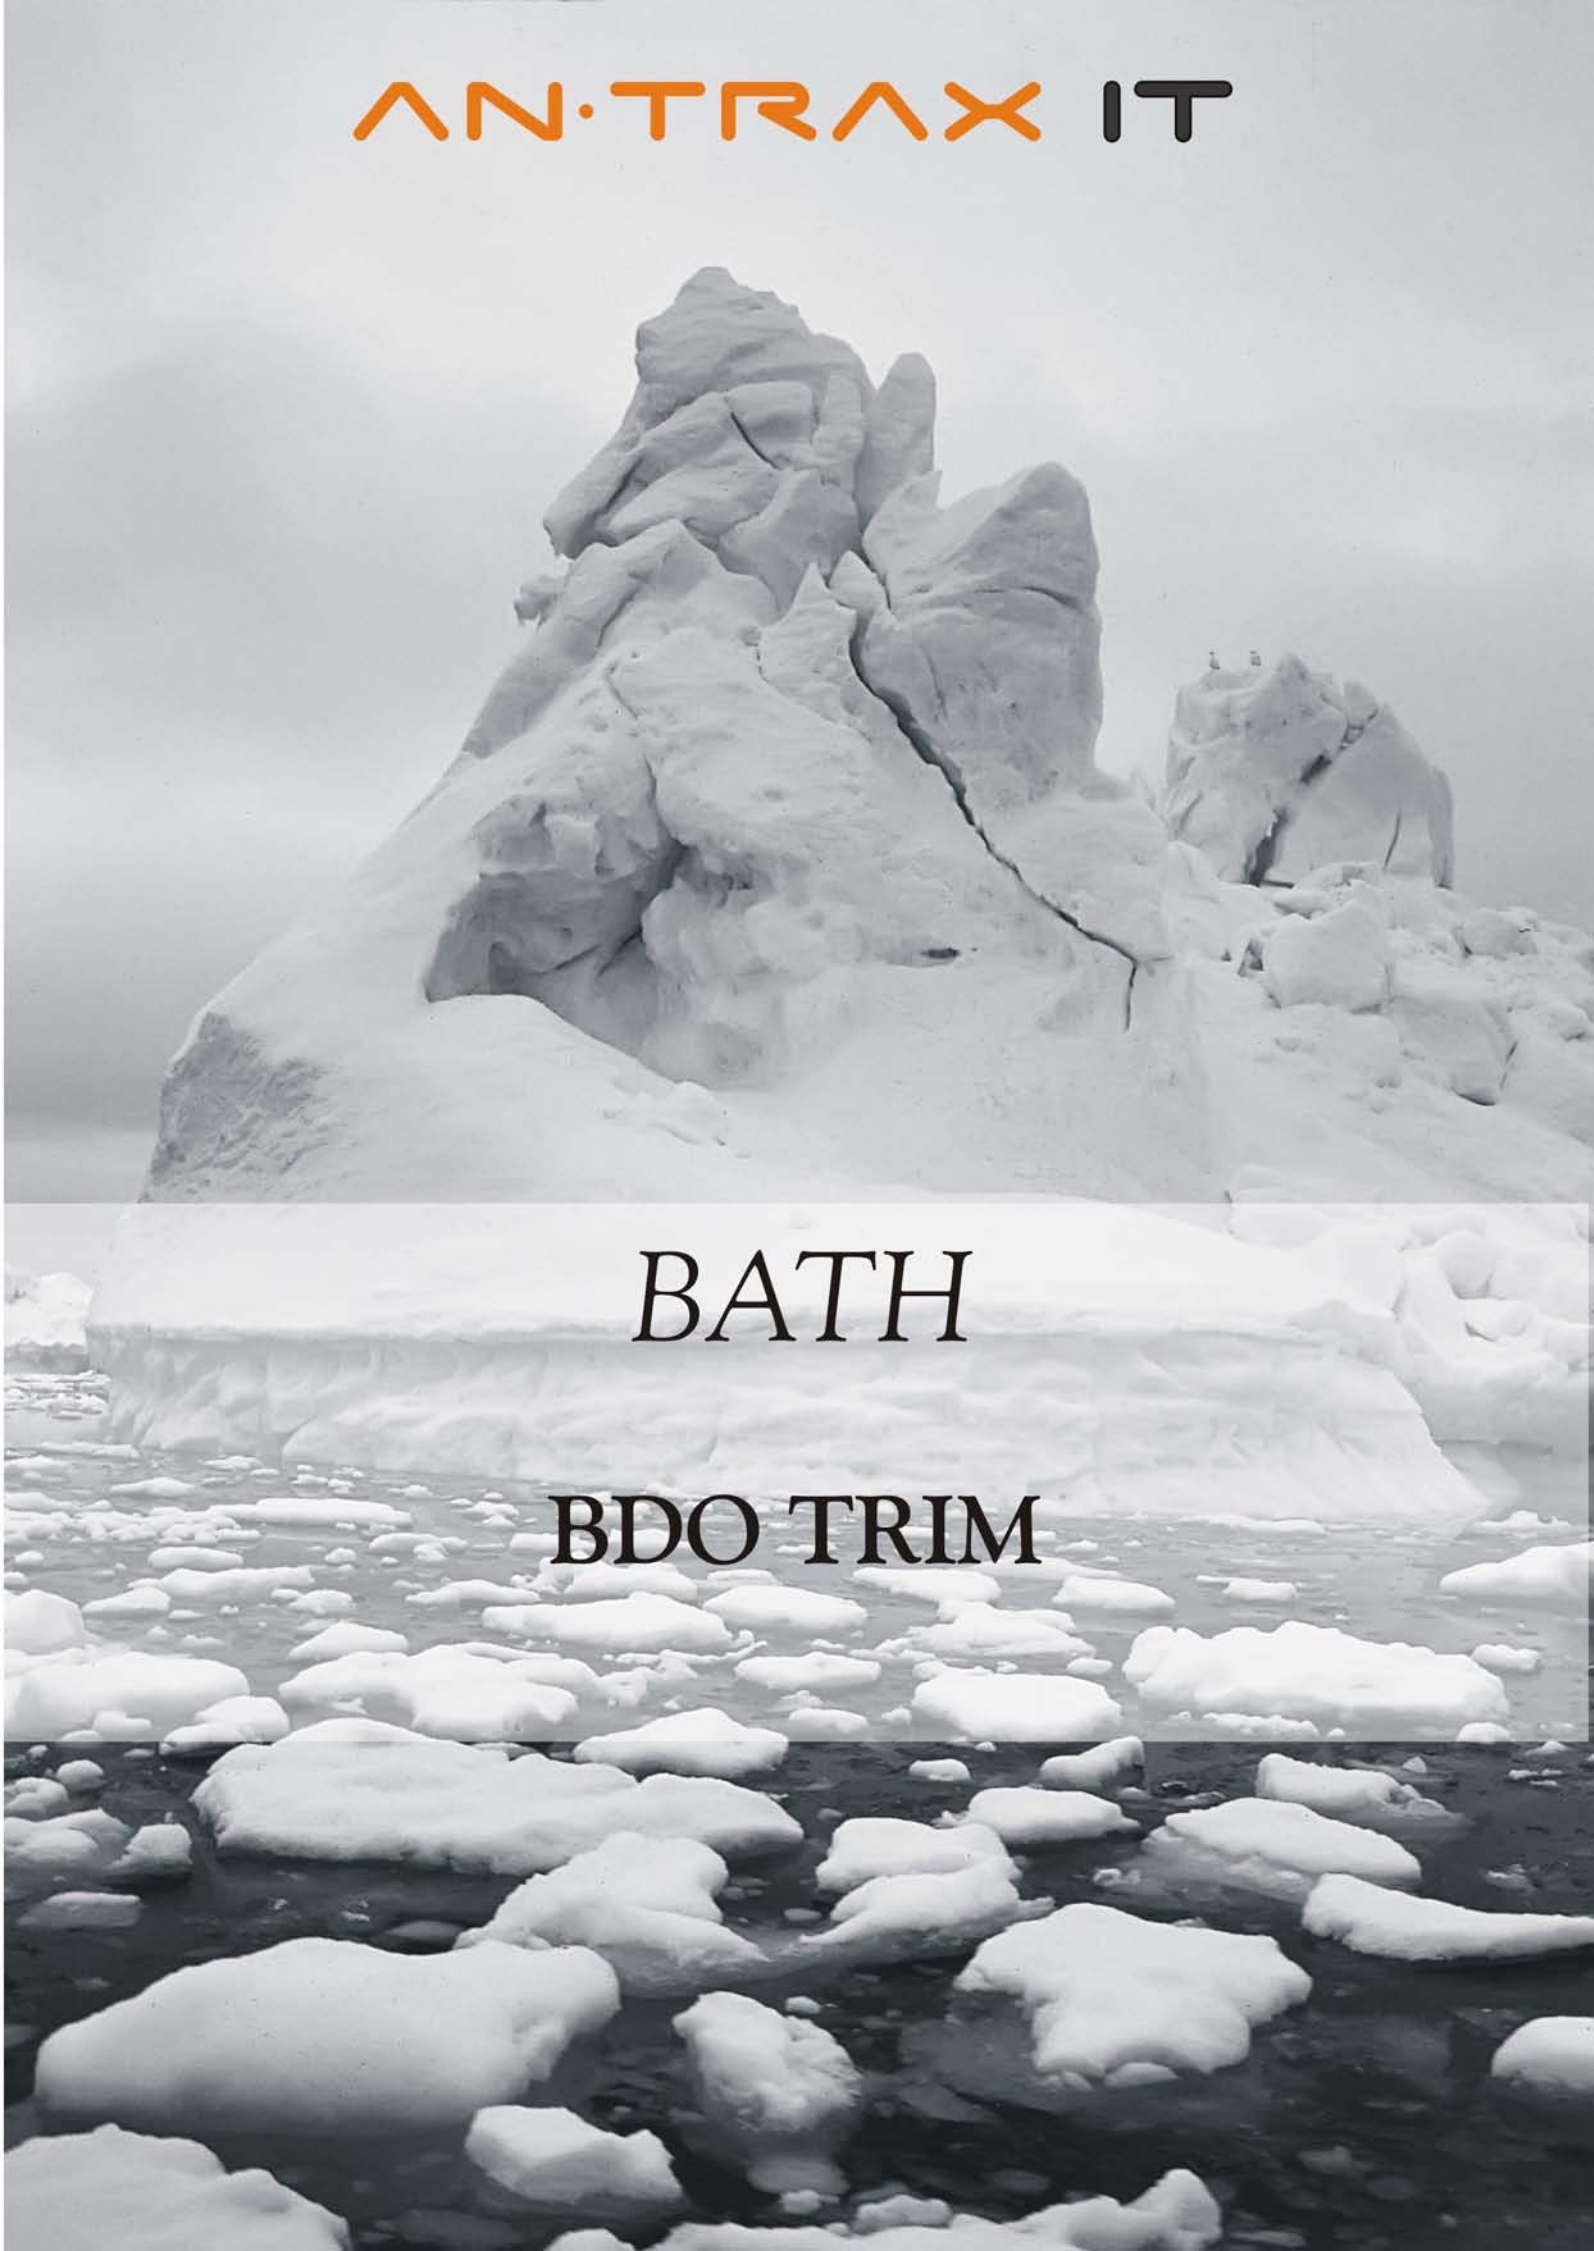

BDO Trim

Scaldasalviette della linea
Trim con sviluppo
orizzontale

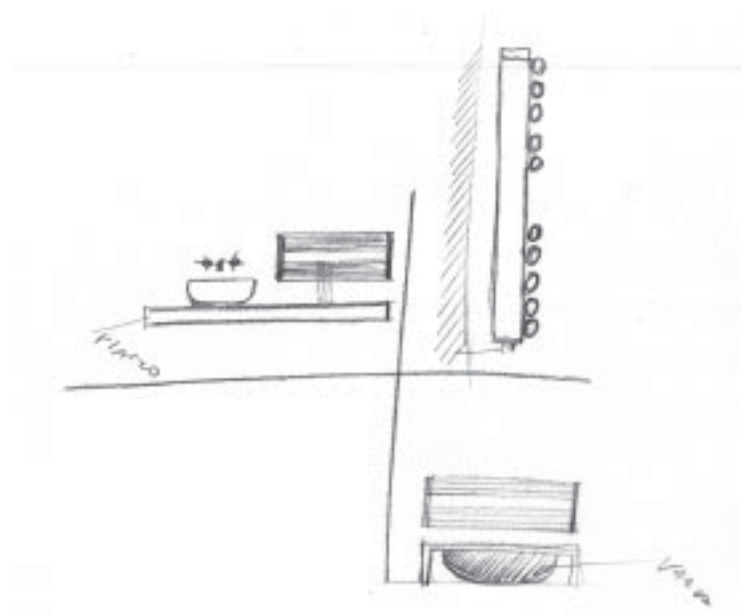

*Towel warmer for the Trim
line set on the horizontal*

*Radiateur sèche-serviettes de
la ligne Trim avec
développement horizontal*

*Handtuchwärmer der Linie
Trim mit waagrechter
Montagerichtung.*

*Calentador de toallas de la
línea Trim con desarrollo
horizontal*



Bath / DBO TRIM
36.8 x 140 cm
WATT ΔT 50° [619]
COLOR : GROPE

INFORMAZIONI TECNICHE / TECHNICAL DETAILS / DONNÉES
TECHNIQUES / TECHNISCHE DATEN / INFORMACIONES TÉCNICAS
PAGE 288

BDO 13

Scaldasalviette della linea
BD13 con sviluppo
orizzontale



*Towel warmer for the BD13
line set on the horizontal.*

*Radiateur sèche-serviettes de
la ligne BD13 avec
développement horizontal.*

*Handtuchwärmer der Linie
BD13 mit waagrechter
Montagerichtung.*

*Calentador de toallas de la
línea BD13 con desarrollo
horizontal.*



Bath / BDO 13
36.8 x 120 cm
WATT ΔT 50° [462]
COLOR : BIAN

INFORMAZIONI TECNICHE / TECHNICAL DETAILS / DONNÉES
TECHNIQUES / TECNISCHE DATEN / INFORMACIONES TÉCNICAS
PAGE 289

BDO 25



Scaldasalviette della linea
BD25 con sviluppo
orizzontale

*Towel warmer for the BD25
line set on the horizontal.*

*Radiateur sèche-serviettes de
la ligne BD25 avec
développement horizontal.*

*Handtuchwärmer der Linie
BD25 mit waagrechter
Montagerichtung.*

*Calentador de toallas de la
línea BD25 con desarrollo
horizontal.*

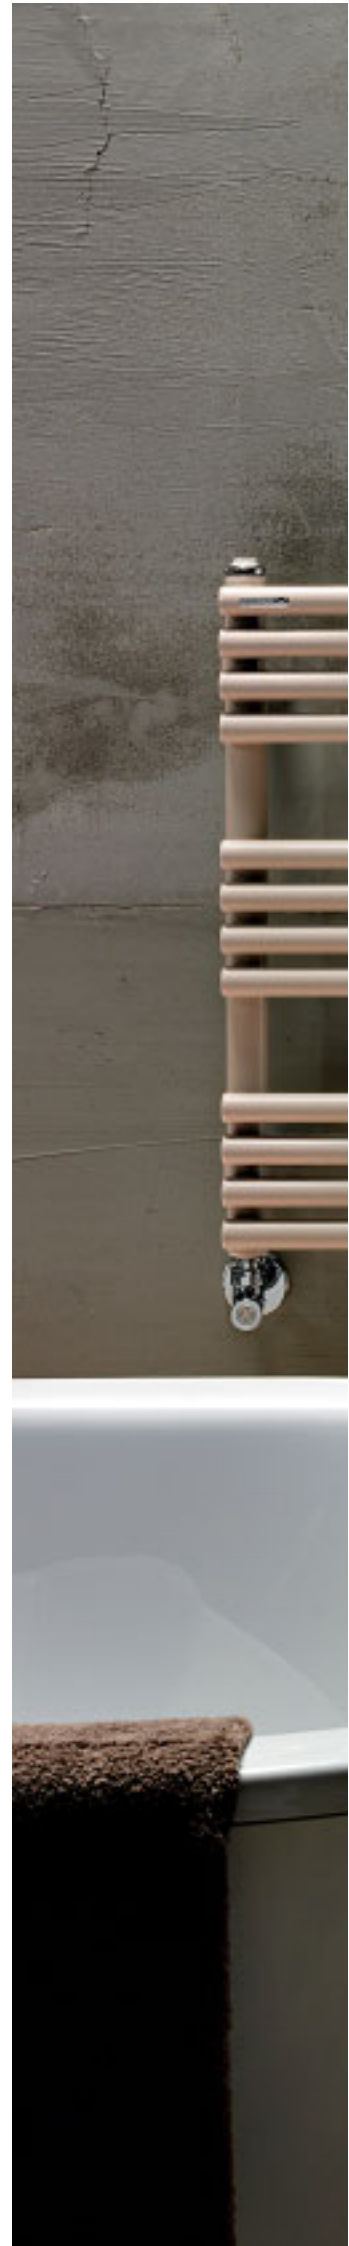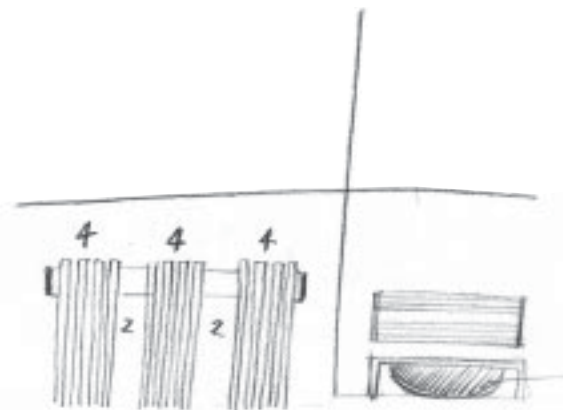





Bath / BDO 25
58.4 x 160 CM
WATT ΔT 50° [958]
COLOR : TELA

INFORMAZIONI TECNICHE / TECHNICAL DETAILS / DONNÉES
TECHNIQUES / TECHNISCHE DATEN / INFORMACIONES TÉCNICAS
PAGE 290


BDO Trim



[A] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 296

A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
36,8	14,5	120,0	47,2	116,0	45,7	HB15000S036120	1823	534
36,8	14,5	140,0	55,1	136,0	53,5	HB15000S036140	2113	619
36,8	14,5	160,0	63,0	156,0	61,4	HB15000S036160	2430	712
58,4	23,0	120,0	47,2	116,0	45,7	HB15000S058120	2734	801
58,4	23,0	140,0	55,1	136,0	53,5	HB15000S058140	3171	929
58,4	23,0	160,0	63,0	156,0	61,4	HB15000S058160	3645	1.068

A* = altezza / height / hauteur / Höhe / alto **B*** = larghezza / width / longueur / Breite / ancho **art*** = articolo / model / modèle / Artikel / artículo
I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones **P*** = pagina / page / page / Seite / página
E* = elettrico / electrical / électric / elektrische / eléctrico **M*** = misto / dual application / mixte / der gemischter Ausführung / kit mixto
ET* = elettrico termostato ambiente / thermostat / thermostat / der Thermostat / termostato
MT* = misto termostato ambiente / dual application with thermostat / mixte avec thermostat / der gemischter Ausführung mit Thermostat / kit mixto con termostato



Ulteriori dettagli
Further details
Ultérieures détails
Weitere Einzelheiten
Otros detalles

P* 294

Colori/ colours / couleurs / Farbe / colores

[BIAN] B standard

T + 10%

S + 20%

[RAL] S + 20%

RAL non inclusi in tabella

special Ral colours

couleurs Ral spéciales

RAL Farbe nicht in der Tabelle inbegriffen

colores RAL especiales

Kcal = Watt x 0,860
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,255


Watt Δt 40° = Watt Δt 50° x 0,758

Watt Δt 30° = Watt Δt 50° x 0,530


Watt Δt 20° = Watt Δt 50° x 0,320

p max = 10.0 bar


BDO 13



[A] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 296

A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
36,8	14,5	120,0	47,2	116,0	45,7	BD13000S036120	1577	462
36,8	14,5	140,0	55,1	136,0	53,5	BD13000S036140	1840	539
36,8	14,5	160,0	63,0	156,0	61,4	BD13000S036160	2102	616
58,4	23,0	120,0	47,2	116,0	45,7	BD13000S058120	2365	693
58,4	23,0	140,0	55,1	136,0	53,5	BD13000S058140	2761	809
58,4	23,0	160,0	63,0	156,0	61,4	BD13000S058160	3154	924

CROM								
A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
36,8	14,5	120,0	47,2	116,0	45,7	BD13000S036120R	1056	310
36,8	14,5	140,0	55,1	136,0	53,5	BD13000S036140R	1233	361
36,8	14,5	160,0	63,0	156,0	61,4	BD13000S036160R	1409	413
58,4	23,0	120,0	47,2	116,0	45,7	BD13000S058120R	1585	464
58,4	23,0	140,0	55,1	136,0	53,5	BD13000S058140R	1850	542
58,4	23,0	160,0	63,0	156,0	61,4	BD13000S058160R	2113	619

A* = altezza / height / hauteur / Höhe / alto B* = larghezza / width / longueur / Breite / ancho art* = articolo / model / modèle / Artikel / artículo
 I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones P* = pagina / page / page / Seite / página
 E* = elettrico / electrical / électric / elektrische / eléctrico M* = misto / dual application / mixte / der gemischter Ausführung / kit mixto
 ET* = elettrico termostato ambiente / thermostat / thermostat / der Thermostat / termostato
 MT* = misto termostato ambiente / dual application with thermostat / mixte avec thermostat / der gemischter Ausführung mit Thermostat / kit mixto con termostato

Kcal = Watt x 0,860
 BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,241
 Watt Δt 40° = Watt Δt 50° x 0,768
 Watt Δt 30° = Watt Δt 50° x 0,546
 Watt Δt 20° = Watt Δt 50° x 0,338

p max = 10.0 bar

Colori/ colours / couleurs / Farbe / colores


[BIAN] B standard
 T + 10%
 S + 20%
 [RAL] S + 20%
 RAL non inclusi in tabella
 special Ral colours
 couleurs Ral spéciales
 RAL Farbe nicht in der Tabelle inbegriffen
 colores RAL especiales

Ulteriori dettagli
 Further details
 Ulteriores détails
 Weitere Einzelheiten
 Otros detalles




P* 294


BDO 25



[A] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 296

A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
36,8	14,5	120,0	47,2	116,0	45,7	BD25000S036120	1635	479
36,8	14,5	140,0	55,1	136,0	53,5	BD25000S036140	1908	559
36,8	14,5	160,0	63,0	156,0	61,4	BD25000S036160	2181	639
58,4	23,0	120,0	47,2	116,0	45,7	BD25000S058120	2454	719
58,4	23,0	140,0	55,1	136,0	53,5	BD25000S058140	2860	838
58,4	23,0	160,0	63,0	156,0	61,4	BD25000S058160	3270	958

A* = altezza / height / hauteur / Höhe / alto B* = larghezza / width / longueur / Breite / ancho art* = articolo / model / modèle / Artikel / artículo
 I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones P* = pagina / page / page / Seite / pági
 E* = elettrico / electrical / électric / elektrische / eléctrico M* = misto / dual application / mixte / der gemischter Ausführung / kit mixto
 ET* = elettrico termostato ambiente / thermostat / thermostat / der Thermostat / termostato
 MT* = misto termostato ambiente / dual application with thermostat / mixte avec thermostat / der gemischter Ausführung mit Thermostat / kit mixto con termostato



Ulteriori dettagli
Further details
Ulérieures détails
Weitere Einzelheiten
Otros detalles

P* 294

Colori/ colours / couleurs / Farbe / colores

[BIAN] B standard
T + 10%
S + 20%

[RAL] S + 20%
RAL non inclusi in tabella
special Ral colours
couleurs Ral spéciales
RAL Farbe nicht in der Tabelle inbegriffen
colores RAL especiales

Kcal = Watt x 0,860
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,238
Watt Δt 40° = Watt Δt 50° x 0,770
Watt Δt 30° = Watt Δt 50° x 0,550
Watt Δt 20° = Watt Δt 50° x 0,342

p max = 10.0 bar

ANTRAX IT SRL
Via BOSCALTO 40
31023 RESANA TV - ITALY
TEL. +39 0423 7174
FAX +39 0423 717474
WWW.ANTRAX.IT
ANTRAX@ANTRAX.IT

